

MACHINE ROOM-LESS ELEVATOR

Model UAG Series SN1



Caring for you, and making you feel comfortable.

HUMAN FRIENDLY

What we are aiming is to fill a building with safe and comfortable products and services, and to make a town even more pleasant for all the people who live, work and visit there. Always caring for you. Always getting close to you. HUMAN FRIENDLY is the R&D concept conveying our thoughts.

Hitachi Building Systems Co., Ltd.

Contact Address:

The information in this catalogue is subject to change without notice.



Creating a New History

Hitachi Group is active in a wide range of business sectors. From the technology and experience built up over many years, come the synergies that feed new innovation.

Hitachi has been developing and manufacturing elevators and escalators since 1920s.

As social demands on elevators change over time, Hitachi's machine room-less elevator model UAG series SN1, developed in Japan, meets the needs of customers in terms of efficiency, safety, comfort, and space savings. Hitachi is creating a new history for elevators, and for your building.




History of Hitachi elevators

•**1932**•First elevator is delivered: freight elevator for Tokyo Electric Co. •**1968**•300-m/min. elevator is delivered to Japan's first skyscraper: Kasumigaseki Building. •**1991**•Power-saving inverter-controlled Ultrahigh-Speed elevator commences operations: Tokyo Metropolitan Government Building No.1. •**2003**•300-m/min. double-deck elevator is delivered: Roppongi Hills Mori Tower, Tokyo. •**2007**•480-m/min., 2,850-kg high-rise shuttle elevator is delivered: Tokyo Midtown, Midtown Tower. •**2008**•World's largest Ultrahigh-Speed double-deck elevator is delivered: Shanghai World Financial Center. •**2011**•600-m/min. Ultrahigh-Speed elevator for the Middle East: Al Hamra Mixed-Use Complex, Kuwait. •**2012**•High-Speed, large-capacity elevator providing access to Japan's highest (450 m) observation platform: TOKYO SKYTREE. •**2017**•The tallest building in Singapore, famous as the winner of the World Architecture News Mixed-Use Award: Tanjong Pagar Centre, Singapore. •**2019**•Delivery of the Ultrahigh-Speed elevators, with a speed of 1,260 m/min. (21 m/sec.): Guangzhou CTF Finance Centre (530 m), China.

Simplified specification selection process

Create the elevator that best meets your needs by selecting specifications and design options from this catalogue.

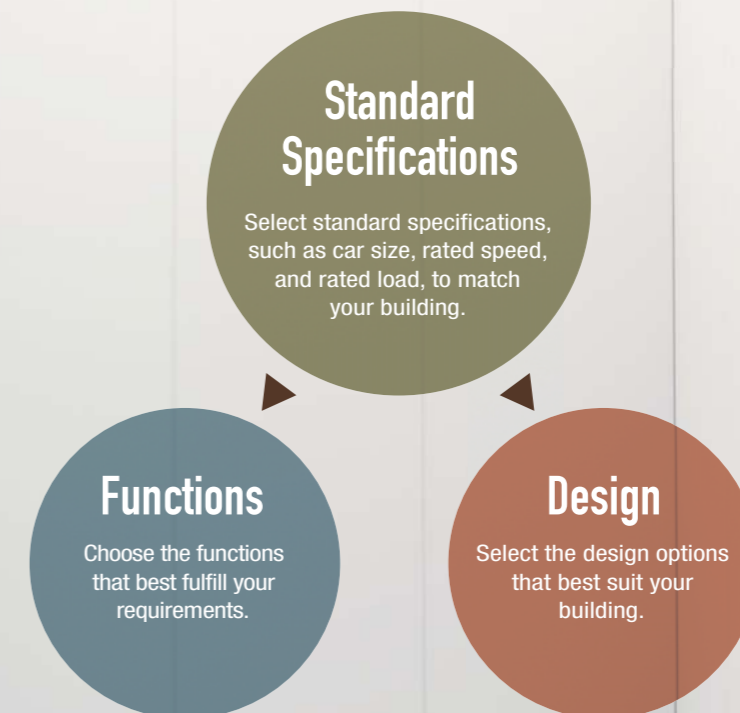


Four classifications of value we provide for your building

Energy efficiency

Page 5, 6

Reduced energy consumption with standard specifications
 Power consumption can be reduced to approximately 1/6.

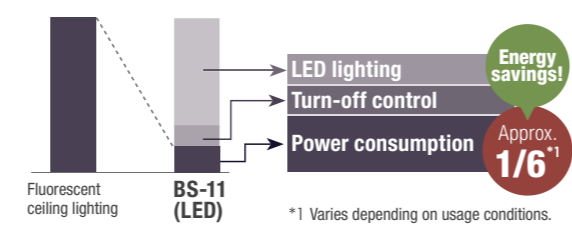

LED lighting

Use of LED lighting reduces the energy consumption by approximately 1/4 and its service life is three times longer compared with fluorescent lighting.

Automatic turn-off of car lighting and fan

Standard

When the elevator is idle, the lighting and ventilation fan in the elevator are automatically turned off to conserve energy. Energy consumption is reduced by adopting LED lighting for the ceiling and by shortening the time until the lighting and fan turn off.

Regenerative system

Option

The traction mechanism acts as a power generator and transmits power back to the building electrical network that reduces energy consumption by approximately 30%.



Comfort

Page 7

Improved riding comfort

Standard


Motor control and vibration-absorbing type guide shoes provide a quiet and smooth ride.

Ion generator

Option

Ion generator works to improve air quality.

Elevator interior deodorizing test*3

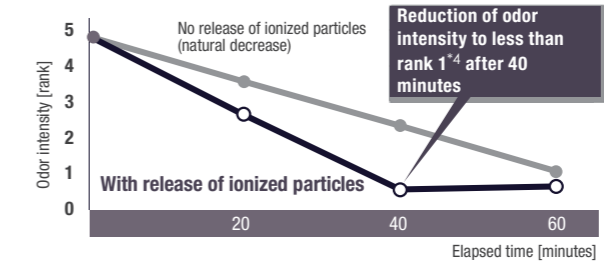

*3 Results after 40 minutes in test performed in (13-passenger) elevator measuring approx. 5.5 m³. Results may differ from those in actual usage space.
 *4 Odor strength rank 1 is defined as "extremely weak odor that is hardly noticeable."



Notes
 - Testing organization: Hitachi Power Solutions Co., Ltd. Testing method: Verification using six-rank odor intensity indication method in passenger elevator with 13-person capacity Deodorizing method: Release of ionized particles Subject: Methyl mercaptan was released and the change in its concentration was measured.

Safety & Emergency

Page 8

Door signal with multi-beam door sensor

Option

Door signal that tells when the door is going to close for enhanced safety.



Micro-leveling

Standard

Automatically corrects the elevator landing level when there is a level difference between car and floor.

Automatic rescue device for power failure

Option

When a power failure is detected, the drive power supply switches over to battery power, and the elevator automatically moves to the nearest floor and releases the passengers.

Design

Page 9, 10

LCD indicators

Option

In-car indicator and hall indicator with color LCD are available. They provide a quick overview of the operating status.



Car and hall designs

Select the most suitable design from the options available, including ceiling and 3 side wall designs created by Hitachi's designers to match a variety of building types.



LED lighting

By adopting LED lighting for all ceiling designs, energy consumption is reduced and service life is prolonged compared with fluorescent lighting.



Power consumption approx. 1/3 that of fluorescent lighting
Employs LED lighting with **approx. 3x² longer service life.**

	Fluorescent ceiling lighting	BS-11 (LED)
Power consumption	69 W	23 W ³
Service life	Approx. 12,000 hours	Approx. 40,000 hours ⁴

Power consumption approx. 1/6 that of fluorescent lighting
Employs LED lighting with **approx. 3x² longer service life.**

	Fluorescent ceiling lighting	SL-11 (LED)
Power consumption	207 W	33 W ³
Service life	Approx. 12,000 hours	Approx. 40,000 hours ⁴

By changing the time until the lighting turns off during standby from three minutes to one minute...

Power consumption can be reduced to approx. 1/6.


	Fluorescent ceiling lighting	BS-11 (LED)
Annual illumination duration	Approx. 3,000 hours	Approx. 1,500 hours ⁵
Annual power consumption	Approx. 207 kWh/year	Approx. 35 kWh/year

By changing the time until the lighting turns off during standby from three minutes to one minute...


Power consumption can be reduced to approx. 1/12.

	Fluorescent ceiling lighting	SL-11 (LED)
Annual illumination duration	Approx. 3,000 hours	Approx. 1,500 hours ⁵
Annual power consumption	Approx. 621 kWh/year	Approx. 50 kWh/year

•Reduction of power consumption

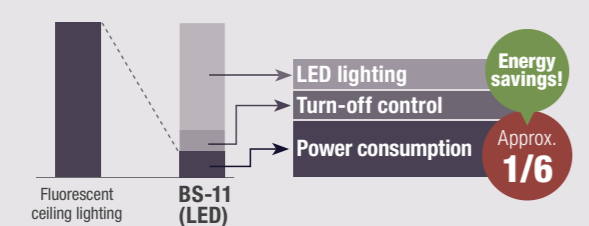

•Reduction of power consumption

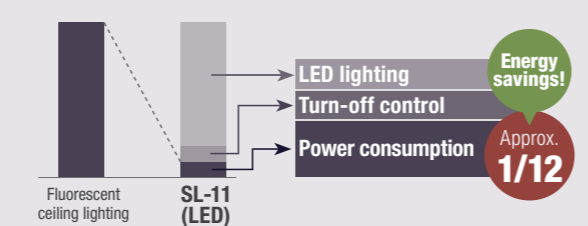

*1 These ceilings are not compliant with EN81-20/50, but they can be used if the customer agrees.
 *2 Comparison with 10-passenger model with fluorescent ceiling lighting. Results may differ depending on ceiling configuration and dimensions.
 *3 Power consumption of fixture including lighting power supply.
 *4 Rated service life of fixture including lighting power supply. Actual service life may vary depending on usage conditions.
 *5 Varies depending on usage conditions.

Automatic turn-off of car lighting and fan

Standard

When the elevator is idle, the lighting and ventilation fan in the elevator are automatically turned off to conserve energy. Energy consumption is reduced by adopting LED lighting for the ceiling and by shortening the time until the lighting and fan turn off.

Regenerative system


Option

Making use of energy generated by the elevator

Making use of the energy generated by the elevator when traveling downwards with a heavy car load or upwards with a light car load, the traction mechanism acts as a power generator and transmits power back to the electrical network in the building.

Flow of regenerated power


••• Industrial power
 — Regenerated power

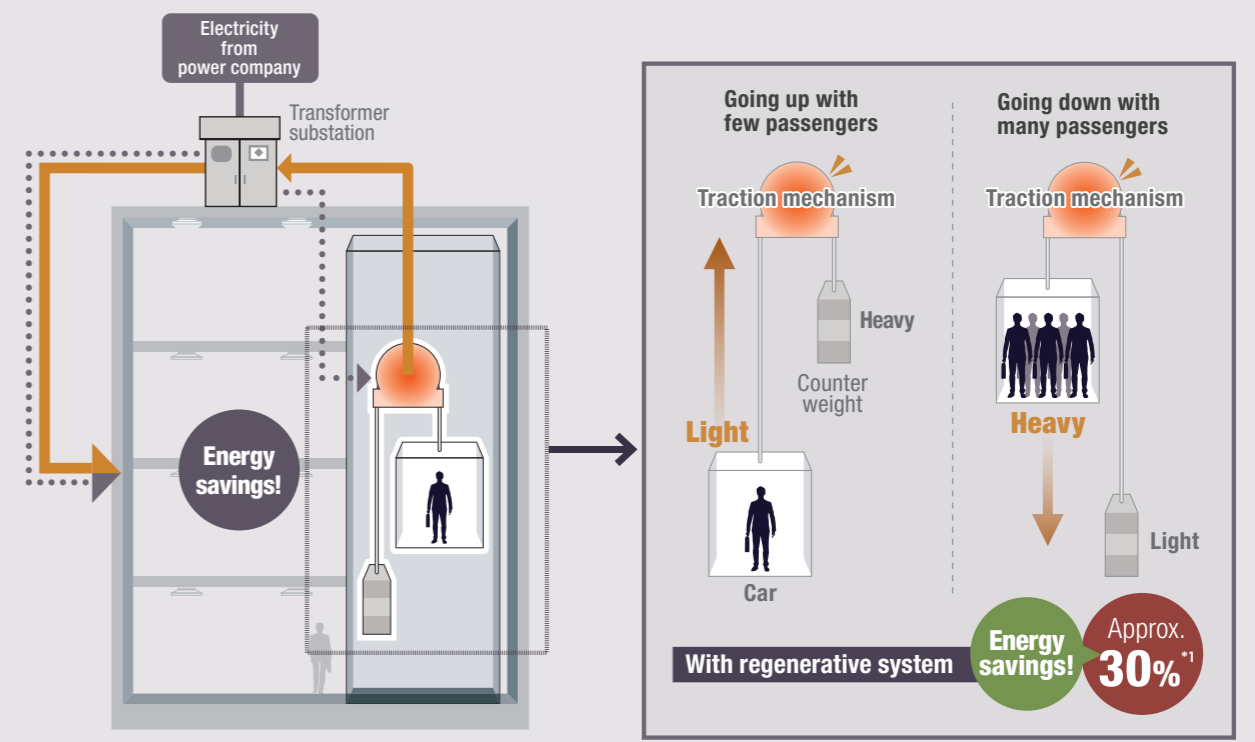

*1 In our model released in 2016, calculation of 30% energy saving is done based on no load in the lift car. The energy savings are calculated theoretically. Differs depending on usage conditions.

Comfort


Ion generator Option

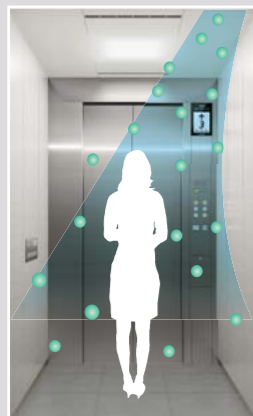


Notes
- Artist's conception.

Ion generator improves air quality.

An ion generator manufactured in Japan is mounted on top of the car. Nano-sized electrostatic atomized water particles work to improve air quality.

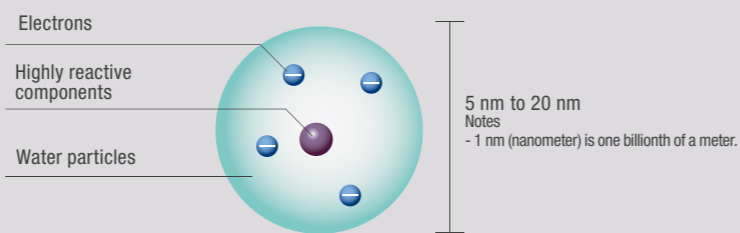

Elevator interior deodorizing test^{*1}

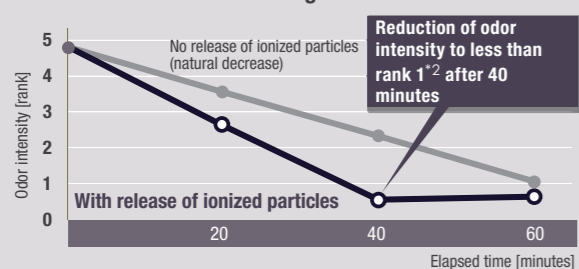

^{*1} Results after 40 minutes in test performed in (13-passenger) elevator measuring approx. 5.5 m³. Results may differ from those in actual usage space.
^{*2} Odor strength rank 1 is defined as "extremely weak odor that is hardly noticeable."

Testing organization: Hitachi Power Solutions Co., Ltd.
Testing method: Verification using six-rank odor intensity indication method in passenger elevator with 13-person capacity
Deodorizing method: Release of ionized particles
Subject: Methyl mercaptan was released and the change in its concentration was measured.

About ionized particles

The ionized particles released into the air come into contact with odor molecules and the OH radicals break down substances that cause odor.¹ Also, the ionized particles come into contact with allergens (pollen² and mites³), bacteria,⁴ and viruses,⁵ and the OH radicals denature their protein and suppress them.

1. Testing organization: Panasonic Corporation Product Analysis Center. Testing method: Direct exposure in 250-liter test space and verification using six-rank odor intensity indication method. Deodorizing method: Release of ionized particles. Subject: Accumulated cigarette odor. Test result: Odor intensity reduction of 0.8 after 30 minutes. Test number: E02-090313MH-01 2. Testing organization: Panasonic Corporation Product Analysis Center. Testing method: Direct exposure in 45-liter test space and measurement using ELISA method. Suppression method: Release of ionized particles. Subject: Allergen (pollen). Test result: Over 99% suppression after two hours. Test number: E02-080303IN-03 3. Testing organization: Panasonic Corporation Product Analysis Center. Testing method: Direct exposure in 45-liter test space and measurement using ELISA method. Suppression method: Release of ionized particles. Subject: Allergen (mites). Test result: Over 98% suppression after two hours. Test number: E02-080204IN-02 4. Testing organization: Kitasato Research Center for Environmental Science. Testing method: Direct exposure in 1-square-meter test vessel and measurement of bacteria count. Suppression method: Release of ionized particles. Subject: Airborne bacteria. Test result: Over 99% suppression after 20 minutes. Kitasato Biogenetic: 20_0154_1. Test performed for one type of bacteria only. 5. Testing organization: Kitasato Research Center for Environmental Science. Testing method: Direct exposure in 1-square-meter test vessel and measurement of virus count. Suppression method: Release of ionized particles. Subject: Airborne virus. Test result: Over 99% suppression after 90 minutes. Kitasato Biogenetic: 20_0154_1. Test performed for one type of virus only.

Notes
-The ionized particles suppress viruses, etc., but they are not guaranteed to prevent infection.
-The ion generator is not available in the following cases:
(1) When the ceiling is supplied by the customer.
(2) When the car internal depth is 1,250 mm or less.

Improved riding comfort Standard

Measures such as control to suppress motor vibration and vibration-absorbing type guide shoes are utilized. These reduce noise and vibration when the elevator is in motion for a smooth and quiet ride.



Safety & Emergency

Door signal with multi-beam door sensor (Closing door alert) Option

The door signal flashes to notify passengers when the door is starting to close.

The multi-beam door sensor is backed by a door signal that notifies passengers when the door is going to close. The LED on the edge of the door starts to blink about one second before the door starts to close. If the door close button in the elevator car is pressed, the LED starts blinking at the same time as the door starts to close.

Door signal

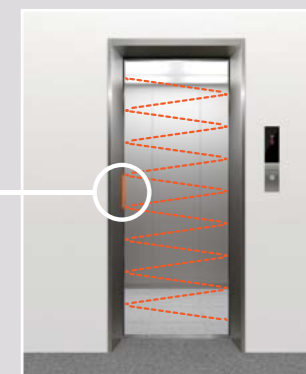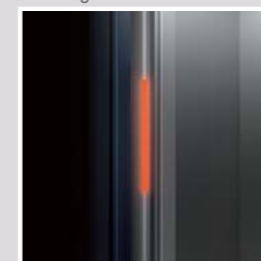

Notes
- Illustration shows simulated view of beams.


Micro-leveling Standard

Automatic correction of elevator landing level when there is a level difference between car and floor. This improves safety when getting on and off the elevator.

Automatic rescue device for power failure Option

In a power failure, the elevator switches to battery operation, and moves to the nearest floor.


When a power failure is detected, the drive power supply switches over to battery power, and the elevator automatically moves to the nearest floor and releases the passengers for safety. This lessens the worry of being trapped in the elevator that has stopped due to a power outage in a building with no private generator equipment.

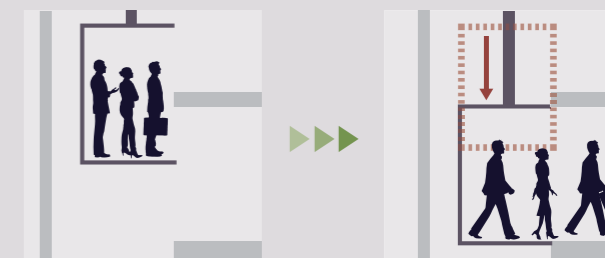

Induction loop for hearing devices Option

This function allows passengers with impaired hearing to use the elevator with confidence. If it is necessary to use the intercom in the elevator to communicate with people at other locations in an emergency, the passenger can select the "Telecoil mode" on their hearing aid or cochlear implant to have the audio signal from the intercom conveyed to them directly. The induction loop for hearing devices is an auxiliary device of the intercom that outputs audio signals magnetically, separately from the usual audio output.^{*1} Operating panel equipped with this function bears the "Induction loop" symbol.

Operating panel with induction loop for hearing devices

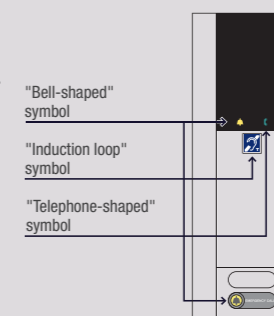

When this function is applied, the "Induction loop" symbol and the indicator light of the "Bell-shaped" symbol and the "Telephone-shaped" symbol are installed on the operating panel.

"Induction loop" symbol:
Not illuminated (Only mark)

"Bell-shaped" symbol:
The yellow graphical symbol blinks from the initiation of the alarm until the end of the alarm.

"Telephone-shaped" symbol:
The green graphical symbol illuminates during voice communication.

Notes
- An induction loop for hearing devices is used in combination with EN81-20/50.
- The illustration is an example.

^{*1} The induction loop for hearing devices covers an effective range of 0.5 meters from the operating panel, between 1.2 to 1.7 meters above the floor.

Ceiling designs (Silkscreen print)

Option

By applying silk screening to the ceilings of SL-11 and DX-101, Hitachi ceiling designs coordinate your elevator with the building decor.

SL-11*¹




SL-11-Oriental mosaic

SL-11-Cube

SL-11-Kaleidoscope

DX-101*¹

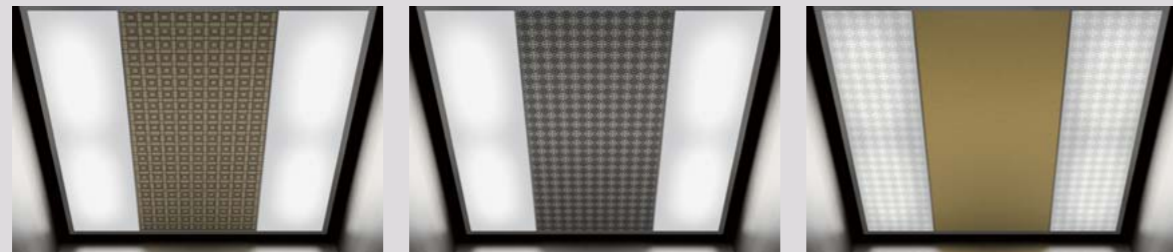

DX-101-Lattice

DX-101-Geometric star

DX-101-Arabesque

*¹ These ceilings are not compliant with EN81-20/50, but they can be used if the customer agrees.

Button designs

A wide range of buttons harmonizes with various building designs.

High-contrast plastic buttons

Standard

High-contrast and raised characters make numbers more legible. Button surfaces are rounded to make it easier to wipe them clean.



Stainless steel buttons

Option

Various stainless steel buttons are available.



Interphone button

Standard

Designed for easy use in an emergency.




In-car LCD indicator

Option

The LCD indicator makes it easy to find necessary information.


An in-car indicator with an 8.4-inch color LCD is available. The LCD with wide angle improves visibility. It displays indications of the operating status, such as earthquake emergency operation, to the user.

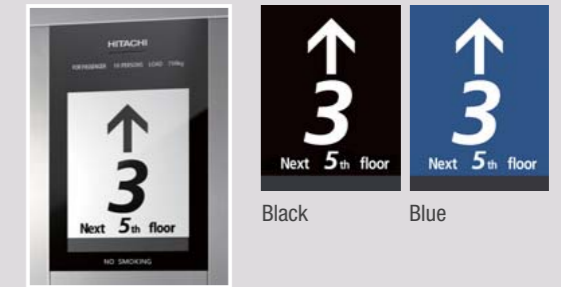

Black

Blue

Normal

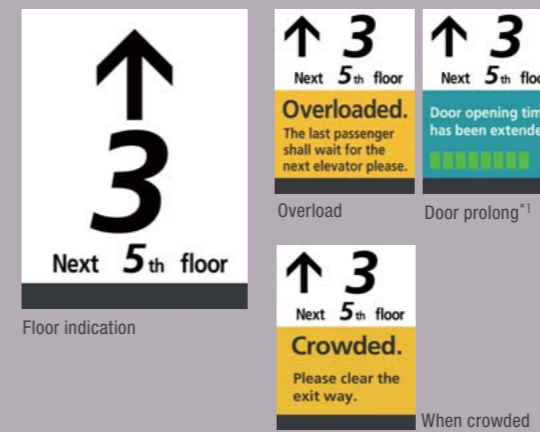

Emergency



*¹ Display indications regarding operation during earthquakes, etc., require that the corresponding functions be installed.

Hall LCD indicator

Option

The hall LCD indicator displays abundant information in the hall.

A hall indicator with a 6.2-inch color LCD is available. Like the in-car LCD indicator, it displays indications of the operating status.




Earthquake*²

*² Display indications regarding operation during earthquakes, etc., require that the corresponding functions be installed.

Recommended designs

Car designs


Choose from a wide range of design options to create an elevator look that matches your building.

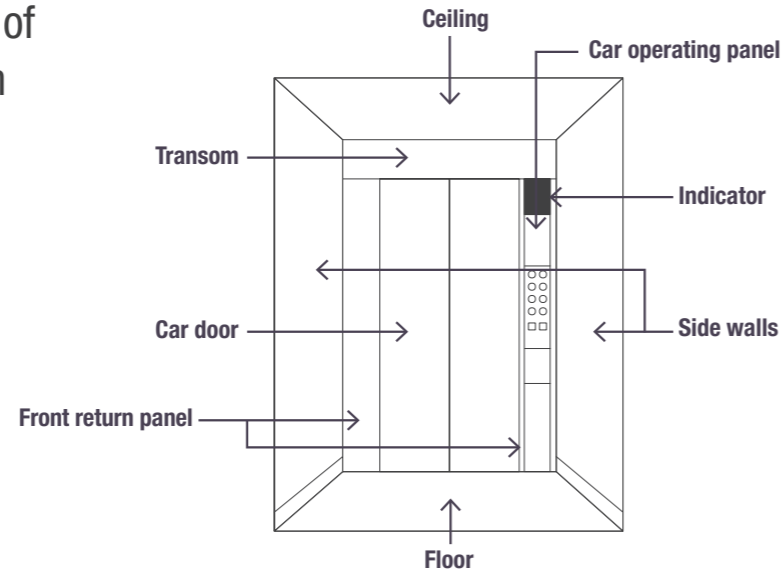

Recommended designs Samples of designs created by a designer.

Stylish design	Chic design	Simple design
<ul style="list-style-type: none"> • Office • Commercial building 	<ul style="list-style-type: none"> • Residence • Hotel 	<ul style="list-style-type: none"> • Transport facility • Hospital
Ceiling: SL-series (SL-11-Oriental mosaic)* ¹ 3 side walls: Decorated steel (Craft wood) Car door: Decorated steel (Craft wood)	Ceiling: SL-series (SL-12) 3 side walls: Decorated steel (Mocha wood) Car door: Decorated steel (Mocha wood)	Ceiling: Standard (BS-11)* ¹ 3 side walls: Stainless steel hairline Car door: Stainless steel hairline
Ceiling: DX-series (DX-101-Geometric star)* ¹ 3 side walls: Decorated steel (Minamo white) Car door: Decorated steel (Minamo white)	Ceiling: DX-series (DX-11) 3 side walls: Laminated plastic sheet (Sandy sakura)* ¹ Car door: Stainless steel hairline	Ceiling: Standard (BS-11)* ¹ 3 side walls: Decorated steel (Minamo white) Car door: Stainless steel hairline

*1 These ceilings and LPS are not compliant with EN81-20/50, but they can be used if the customer agrees.

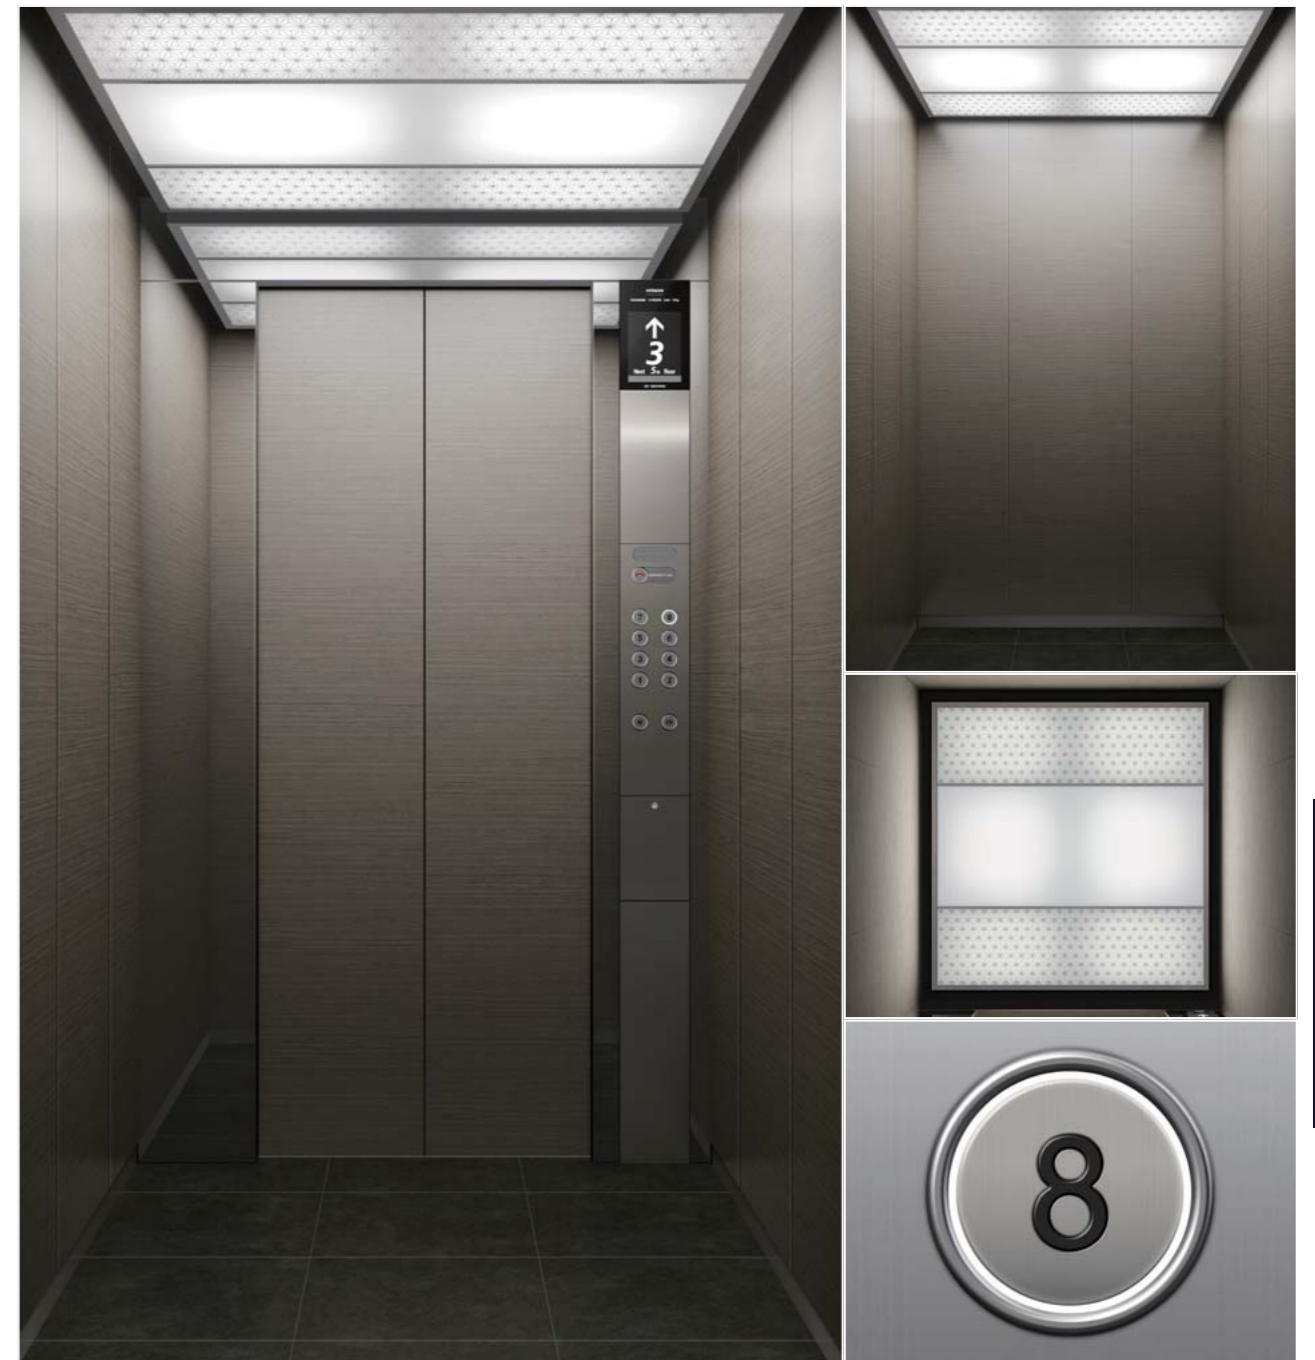

Design variations

Stylish design (for office)

Specifications	
Ceiling	SL-series (SL-11-Oriental mosaic)* ¹
3 side walls	Decorated steel (Craft wood)
Car door	Decorated steel (Craft wood)
Front return panel/Transom	Stainless steel mirror
Floor	Vinyl tile (S 672M)
Indicator	LCD (8.4-inches)
Car operating panel	Stainless steel non-directional hairline

Notes
 - Illustrations show simulated views of elevator interiors. Actual illumination brightness and colors may differ.
 *1 The ceiling is not compliant with EN81-20/50, but it can be used if the customer agrees.



Stylish design (for commercial building)

Specifications	
Ceiling	DX-series (DX-101-Geometric star)*1
3 side walls	Decorated steel (Minamo white)
Car door	Decorated steel (Minamo white)
Front return panel/Transom	Stainless steel non-directional hairline
Floor	Vinyl tile (S 442M)
Indicator	LCD (8.4-inches)
Car operating panel	Stainless steel non-directional hairline

Notes
 - Illustrations show simulated views of elevator interiors. Actual illumination brightness and colors may differ.
 *1 The ceiling is not compliant with EN81-20/50, but it can be used if the customer agrees.



Chic design (for residential building)

Specifications	
Ceiling	SL-series (SL-12)
3 side walls	Decorated steel (Mocha wood)
Car door	Decorated steel (Mocha wood)
Front return panel/Transom	Stainless steel Non-directional hairline
Floor	Vinyl tile (S 673M)
Indicator	LCD (8.4-inches)
Car operating panel	Stainless steel non-directional hairline



Chic design (for hotel)

Specifications	
Ceiling	DX-series (DX-11)
3 side walls	Laminated plastic sheet (Sandy sakura)*1
Car door	Stainless steel hairline
Front return panel/Transom	Stainless steel hairline
Floor	Vinyl tile (S 672M)
Indicator	LCD (8.4-inches)
Car operating panel	Stainless steel hairline

Notes
 - Illustrations show simulated views of elevator interiors. Actual illumination brightness and colors may differ.
 *1 The LPS is not compliant with EN81-20/50, but it can be used if the customer agrees.


Design variations



Simple design (for transport facility)

Specifications	
Ceiling	Standard (BS-11)*1
3 side walls	Stainless steel hairline
Car door	Stainless steel hairline
Front return panel/Transom	Stainless steel hairline
Floor	Vinyl tile (S 670M)
Indicator	Dot matrix
Car operating panel	Stainless steel hairline


Hall designs

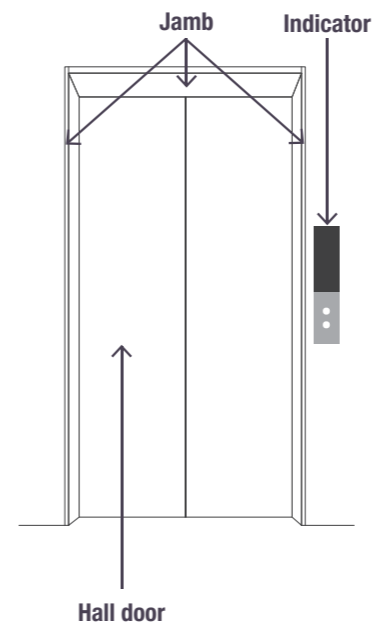

AS-1X (2PCO)

Standard


Jamb: Stainless steel hairline
Hall door: Stainless steel hairline
Indicator: Dot-matrix



SS-1X (2PCO)

Option

Jamb: Stainless steel hairline
Hall door: Stainless steel hairline
Indicator: Dot-matrix



Simple design (for hospital)

Specifications	
Ceiling	Standard (BS-11)*1
3 side walls	Decorated steel (Minamo white)
Car door	Stainless steel hairline
Front return panel/Transom	Stainless steel hairline
Floor	Vinyl tile (S 671M)
Indicator	LCD (8.4-inches)
Car operating panel	Stainless steel hairline


Notes
- Illustrations show simulated views of elevator interiors. Actual illumination brightness and colors may differ.
*1 The ceiling is not compliant with EN81-20/50, but it can be used if the customer agrees.



TS-1X (2PCO)

Option


Jamb: Stainless steel hairline
Hall door: Stainless steel hairline etching (SD-1038)
Indicator: LCD



SL-2X (2PCO)

Option


Jamb: Stainless hairline
Hall door: Stainless steel hairline
Indicator: LCD



TL-2X (2PCO)

Option

Jamb: Stainless steel hairline
Hall door: Stainless steel hairline
Indicator: LCD



Notes
- Illustrations show simulated views of elevator interiors. Actual illumination brightness and colors may differ.

Ceilings and Handrails

Ceilings

Standard

Standard


BS-11^{*1} **Center:** Milky white acrylic^{*2}
Surrounding: Painted steel (White)




Select

Option

SL-11^{*1} **Entire surface:** Milky white acrylic
Surrounding: Extruded aluminum

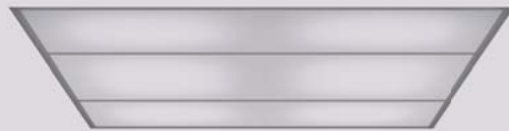




SL-12 **Entire surface:** Painted steel (White)
Illumination slits: Painted steel (Black)
Surrounding: Extruded aluminum

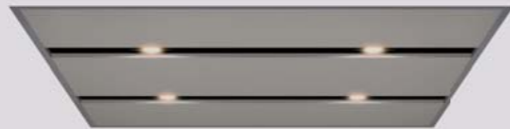

Variations of SL-11

Silkscreen print

Option

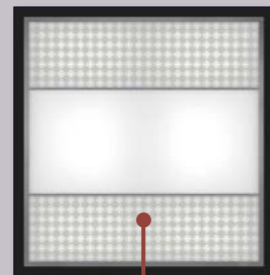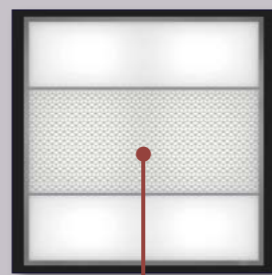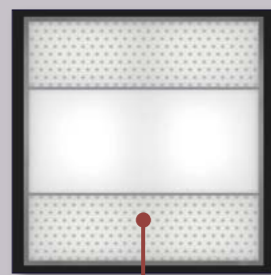

Notes
- It is also possible to use ceiling materials supplied and installed by the customer.
- Depending on applicable regulations, car top emergency trap door may be required.
*1 These ceilings are not compliant with EN81-20/50, but they can be used if the customer agrees.
*2 For some car sizes, there are two milky white acrylic options.

Deluxe

Option

DX-101^{*1} **Center:** Painted steel (White)
Both sides: Milky white acrylic
Surrounding: Extruded aluminum







DX-11 **Center:** Painted steel (White) / Indirect lighting
Both sides: Painted steel (White) / Down light
Surrounding: Extruded aluminum



Variations of DX-101

Silkscreen print

Option

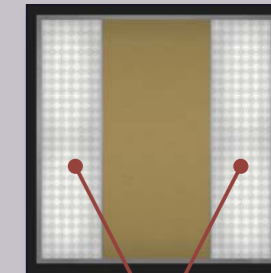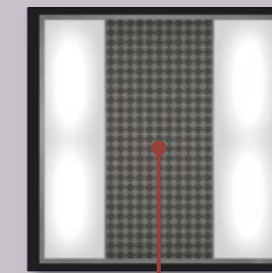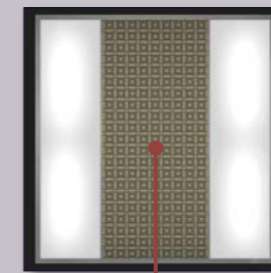

Notes
- It is also possible to use ceiling materials supplied and installed by the customer.
- Depending on applicable regulations, car top emergency trap door may be required.
*1 These ceilings are not compliant with EN81-20/50, but they can be used if the customer agrees.

Handrails

Option



Round pipe type (stainless steel hairline)
Diameter: 32 mm



Flat type (stainless steel hairline)
Width: 50 mm



Flat type (aluminum)
Width: 90 mm^{*2}

*2 Bed type: 2-line flat handrail (aluminum) (width: 90 mm) is standard.

Notes
- Illustrations show simulated views of handrail designs. Actual illumination brightness and colors may differ.

Operating panels and indicators

Car operating panels

Stainless steel cover plate

Indicator type
(Dot-matrix) (LCD)
Standard **Option**

Car position indicators (LCD) **Option**
In addition to white, you can select black or blue as the background color.

White (standard color) Black Blue

Horizontal operating panels **Option**

Stainless steel cover plate

Without indicator With indicator (for wheelchair use)

The car operating panel is installed on the side wall, if the front return panel width is less than 300 mm.

Indicator type
(Dot-matrix) (LCD)
Standard **Option**

OPV/D OPV/L OPW/D OPW/L

Car button types

Plastic **Standard** **Stainless steel hairline** **Option**

5 P14F-UL 8 UB15R-2 8 UB15R-4

EMERGENCY CALL Interphone button*2 8 UB15S-2 8 UB15S-4

EMERGENCY CALL Interphone button*2

Illumination colors^{*1}

8 Red 8 White 8 Yellow

Hall operating panels

Stainless steel cover plate

Incorporated type (Dot-matrix) **Standard**

Incorporated type (LCD) **Option**

VIB-14B/D VIB-14B/L

Separate type **Option**

Separate type (for wheelchair use) **Option**

HBC

Car position indicators (LCD) **Option**
In addition to white, you can select black or blue as the background color.

White (standard color) Black Blue

Horizontal indicators

Stainless steel cover plate

Dot-matrix

HF-119

LCD^{*1}

HF-CL11

Hall lanterns

Stainless steel cover plate

Square lanterns (LED) **Round lanterns (LED)**

HLC-304^{*2} HLC-303^{*2}

Triangle lanterns (horizontal type) (LED)

HLS-025S2^{*2}

Triangle lanterns with dot-matrix indicator (LED)

HLS-025SD2^{*2}

Hall button types

Plastic **Standard** **Stainless steel hairline** **Option**

P14F-UL UB15R-2 UB15R-4

UB15S-2 UB15S-4

Illumination colors^{*3}

Red White Yellow

*1 Illumination colors are only applicable for stainless steel hairline buttons.
*2 Only circular interphone buttons are available. Other specifications (illumination color, Braille, etc.) of the interphone button change according to each floor button. Please consult Hitachi or a local agent if other specifications are required.

*1 The LCD backlight can be changed to black or blue. (Standard color: White)
*2 Stainless steel non-directional hairline cover is available. (Option)
The lantern illumination color can be changed to white. (Standard illumination color: Umber)
*3 Illumination colors are only applicable for stainless steel hairline buttons.

Materials

Car



Hall




A [Car] Front wall / Transom

Stainless steel


Standard¹

Option

Option



Hairline¹




Non-directional hairline



Mirror

Decorated steel


Option



Minamo white



Craft wood



Mocha wood

Stainless steel hairline etching

Option



SD-1006



SD-1010



SD-1038



SD-1046

□: Etched area ■: Non-etched area


B [Car] Door / 3 side walls [Hall] Door

Stainless steel


Standard¹

Option

Option



Hairline¹




Non-directional hairline



Mirror

Decorated steel


Option



Minamo white



Craft wood



Mocha wood

* Decorated steel cannot be used for the hall door.

Stainless steel hairline etching

Option



SD-1006



SD-1010



SD-1038




SD-1046

□: Etched area ■: Non-etched area

Laminated plastic sheet (LPS)^{*2}

Option




7170UN
Metal Pearl
Rosewood



2726NT
Natural Beech




5261NT
Sandy Sakura



7171UN
Metal Pearl Steel



7158UN
Cosmic Dusk



7157UN
Cosmic Dawn



0869NT
Powdered Oak



8834NT
Smoke Strand

C [Hall] Jamb / Transom

Stainless steel


Standard¹

Option

Option



Hairline¹



Non-directional hairline




Mirror


D [Car] Floor

Vinyl tile


Standard




S 442M^{*3}



S 444M^{*3}




S 629M^{*3}




S 670M^{*3}




S 671M^{*3}



S 672M^{*3}



S 673M^{*3}



P 0803^{*4}



P 0807^{*4}

Notes

- It is also possible to use floor materials supplied by the customer. The colors printed in the catalog may differ slightly from the actual colors.
- *1 SUS430 (Standard), SUS304 (Option)
- *2 These LPS are not compliant with EN81-20/50, but they can be used if the customer agrees.
- *3 These vinyl tiles are compliant with EN81-20/50.
- *4 These vinyl tiles are not compliant with EN81-20/50, but they can be used if the customer agrees.

Design variations

Car design variations

● : Standard / ○ : Option / - : Not applicable

No.	Item	Finishes / Types	Passenger Service	Bed ^{*1}
1	Ceiling ^{*2}	Standard (BS-11) ^{*3}	●	●
2		Select (SL-11) ^{*3} (SL-11-Oriental mosaic) ^{*3} (SL-11-Cube) ^{*3} (SL-11-Kaleidoscope) ^{*3} (SL-12)	○	○ ^{*4}
3		Deluxe (DX-101) ^{*3} (DX-101-Lattice) ^{*3} (DX-101-Geometric star) ^{*3} (DX-101-Arabesque) ^{*3} (DX-11)	○	○
4	Car door / 3 side walls	Stainless steel hairline	●	●
5		Stainless steel hairline etching (SD-1006) (SD-1010) (SD-1038) (SD-1046)	○	○
6		Stainless steel mirror	○	○
7		Stainless steel non-directional hairline	○	○
8		Decorated steel ^{*5} (Minamo white) (Craft wood) (Mocha wood)	○	○
9		Laminated plastic sheet ^{*6} (7170UN) (2726NT) (5261NT) (7171UN) (7158UN) (7157UN) (0869NT) (8834NT)	○	○
10	Rust proof coating steel	○	○	
11	Front wall / transom	Stainless steel hairline	●	●
12		Stainless steel hairline etching (SD-1006) (SD-1010) (SD-1038) (SD-1046)	○	○
13		Stainless steel mirror	○	○
14		Stainless steel non-directional hairline	○	○
15		Decorated steel	○	○
16	Rust proof coating steel	○	○	
17	Kick plate	Stainless steel hairline	●	●
18	Sill	Extruded hard aluminum	●	●
19		Stainless steel	○	○
20	Floor ^{*8}	Compliant with EN81-20/50 ^{*9}	●	●
21		Not compliant with EN81-20/50 ^{*10}	●	●
22	Handrail	Round type stainless steel hairline	○	—
23		Flat type stainless steel hairline	○	—
24		aluminum	—	●
25	Car operating panel	Vertical ^{*11}	●	●
26		LCD indicator (OPV/L, OPW/L) (White, Black, Blue)	○	○
27		Horizontal	○	○
28	Horizontal for wheelchair	Dot-matrix indicator	○	○
29	Car operating panel cover plate	Stainless steel hairline	●	●
30		Stainless steel mirror	○	○
31		Stainless steel non-directional hairline	○	○
32	Button type	Plastic (P14F-UL)	●	●
33		Stainless steel hairline ^{*12} (UB15R-2) (UB15R-4) (UB15S-2) (UB15S-4)	○	○

*1 Bed type: Available for Thailand, Myanmar, Cambodia, Laos, the Philippines, Vietnam, Macau, Indonesia and Saudi Arabia.
 *2 It is also possible to use materials supplied and installed by the customer.
 *3 These ceilings are not compliant with EN81-20/50, but they can be used if the customer agrees.
 *4 SL-12 is not available for the bed type.
 *5 Not applicable if the ceiling height or entrance height is increased from standard.
 *6 The LPS comes with a stainless steel hairline trim edge.
 *7 These LPS are not compliant with EN81-20/50, but they can be used if the customer agrees.
 *8 When flooring is supplied by the customer, the floor recess shall be 20 mm or 25 mm.
 *9 These vinyl tiles are compliant with EN81-20/50.
 *10 These vinyl tiles are not compliant with EN81-20/50, but they can be used if the customer agrees.
 *11 Depending on the size of the car, may be mounted on the side wall.
 *12 The available button illumination colors are yellow, red, and white.

Hall design variations

● : Standard / ○ : Option / - : Not applicable

No.	Item	Finishes / Types	Passenger Service	Bed ^{*1}	
1	Jamb type	AS-1X	●	●	
2		SS-1X	○	○	
3		TS-1X	○	○	
4		SL-2X (Max transom height: 900 mm)	○	—	
5		TL-2X (Max transom height: 900 mm)	○	—	
6	Jamb finish	Stainless steel hairline	●	●	
7		Stainless steel mirror	○	○	
8		Stainless steel non-directional hairline	○	○	
9		Rust proof coating steel	○	○	
10	Transom finish	Stainless steel hairline	○	—	
11		Stainless steel mirror	○	—	
12		Stainless steel non-directional hairline	○	—	
13		Rust proof coating steel	○	—	
14	Hall door	Stainless steel hairline	●	●	
15		Stainless steel hairline etching (SD-1006) (SD-1010) (SD-1038) (SD-1046)	○	○	
16		Stainless steel mirror	○	○	
17		Stainless steel non-directional hairline	○	○	
18		Laminated plastic sheet ^{*2} (7170UN) (2726NT) (5261NT) (7171UN) (7158UN) (7157UN) (0869NT) (8834NT)	○	○	
19		Rust proof coating steel	○	○	
20	Sill	Extruded hard aluminum	●	●	
21		Stainless steel	○	○	
22	Hall button cover plate	Incorporated indicator	Stainless steel hairline	●	●
23			Stainless steel mirror	○	○
24			Stainless steel non-directional hairline	○	○
25		Separate indicator	Stainless steel hairline	○	○
26			Stainless steel mirror	○	○
27	Stainless steel non-directional hairline	○	○		
28	Hall button cover plate for wheelchair use	Incorporated indicator	Stainless steel hairline	○	○
29			Stainless steel mirror	○	○
30			Stainless steel non-directional hairline	○	○
31		Separate indicator	Stainless steel hairline	○	○
32			Stainless steel mirror	○	○
33			Stainless steel non-directional hairline	○	○
34	Indicator	Vertical	Dot-matrix	●	●
35			LCD (White, Black, Blue)	○	○
36		Horizontal	Dot-matrix (HF-119)	○	○
37			LCD (HF-CL11) (White, Black, Blue)	○	○
38	Horizontal indicator cover plate	Stainless steel hairline	○	○	
39		Stainless steel mirror	○	○	
40		Stainless steel non-directional hairline	○	○	
41	Button type	Plastic (P14F-UL)	●	●	
42		Stainless steel hairline ^{*3} (UB15R-2) (UB15R-4) (UB15S-2) (UB15S-4)	○	○	
43	Lantern	Vertical	Square lanterns (HLC-304) (Orange, White)	○	○
44			Round lanterns (HLC-303) (Orange, White)	○	○
45		Horizontal	Triangle lanterns (HLS-025S2)	○	○
46			Triangle lanterns with dot-matrix indicator (HLS-025SD2)	○	○
47	Lantern cover plate	Stainless steel hairline	○	○	
48		Stainless steel mirror	○	○	
49		Stainless steel non-directional hairline	○	○	

*1 Bed type: Available for Thailand, Myanmar, Cambodia, Laos, the Philippines, Vietnam, Macau, Indonesia and Saudi Arabia.
 *2 The LPS comes with a stainless steel hairline trim edge and cannot be used for the hall door when fire rated doors are required.
 *3 The available button illumination colors are yellow, red, and white.

Functions

● : Standard / ○ : Option

No.	Name	Description	Passenger Service	Bed ^{*1}
Operating systems				
1	Simplex collective control	This is a fully automatic operation used for a single elevator system. Hall calls in the direction in which the elevator is travelling are responded to sequentially and when all calls in that direction are cleared, calls in the opposite direction are responded to. When there are no more calls, the elevator will stop at the last floor served.	●	●
2	Duplex collective control	This is a fully automatic operation used for a two-elevator system. Hall calls are responded to by whichever elevator that can serve the hall call faster. When there are no more calls, one of the elevators will stand by at the stand by floor while the other elevator stays at the last floor served.	○	○
3	Group control	FI-10 This is a simplified group control system used to operate three or four elevators. The system provides a ring control to allocate the elevator car closed to the floor where a new hall call is registered.	○	○
4		FI-100 This is a group control system used to operate three to six elevators in a medium-sized building. This control system uses "reference-trajectory control", which is based on the theory used in the highest model of the "future reference-trajectory control".	○	○
Service functions				
1	Automatic return function	After all the calls have been served, the elevator will return to the stand by floor for stand by.	○ ^{*2}	○ ^{*2}
2	Attendant operation	For this system, the stop floor is manually set by an attendant, such as in a department store.	○	○
3	Independent operation	This operation system is used when there is a need to serve special passengers. Under this operation, all hall calls are disabled for the elevator and it is reserved for exclusive use of the special passengers.	○	●
4	Parking operation	The elevator can be parked at the parking floor by a key switch.	○ ^{*3}	○ ^{*3}
5	Rush-hour schedule operation	All the elevators will automatically return to the stand by floor, after serving the last call during this preset rush-hour timing.	○	○
6	Separated simplex operation	When duplex collective control or group control is used, a selector switch on the control panel is used to switch between parallel operation and independent operation.	○	○
7	Interphone system	An interphone system is provided for emergency communication between the elevator and the master unit in the supervisory panel, etc.	●	●
8	Floor lock-out operation	Specific service floors can be locked-out by activating a switch.	○	○
9	Temporary call registration of certain restricted floor	By inputting a pre-programmed code using the car operating board floor buttons, passengers can gain access to certain restricted floors.	○	○
10	Door nudging operation	When the door has been open for a certain period of time, a buzzer sounds and the door forcibly closes.	○	○
Safety functions				
1	Abnormal speed protection function	In the event that the elevator is moving downwards at an abnormally high speed, the brakes will be automatically engaged and the elevator will cease operation.	●	●
2	Out of door-open zone alarm	In the event that the elevator stops out of the door-open zone of a selected floor, doors will not open, and an alarm will sound in the elevator.	●	●
3	Rescue operation	When the elevator stops out of the door-open zone, it will move to the nearest floor at slow speed to release passengers.	●	●
4	Door safety return system	In the event of door overload, such as when passengers get their fingers, hands or personal belongings caught in the door, this system automatically senses this and either re-closes or re-opens the doors to prevent injury.	●	●
5	Micro-leveling	Automatic correction of elevator landing level when there is a level difference between car and floor.	●	●
6	Car emergency lighting	In the event of a power failure, an emergency light inside the elevator will be automatically activated.	●	●
7	Emergency Battery Operated Power Supply (EBOPS / UPS)^{*4}	In the event of a power failure, this emergency supply allows the operation of a light and alarm bell, etc.	○	○
8	Multi-beam door sensor	In the event that the beam paths are obstructed, this sensor, installed at the edge of the doors, will keep the doors open.	●	●
9	Door signal with multi-beam door sensor	In addition to the multi-beam door sensor, the safety shoe is equipped with a signal that indicates when the doors are starting to close. (2PCO: Both sides, 2S2P: One side)	○	○
10	Door safety edge	Mechanical safety units are installed on both sides (2PCO) or one side (2S2P) of the elevator doors. In the event of passengers coming into contact with the safety edges of closing doors, the doors will immediately reopen.	○	○

*1 Bed type: Available for Thailand, Myanmar, Cambodia, Laos, the Philippines, Vietnam, Macau, Indonesia and Saudi Arabia.
 *2 Included in the standard configuration when duplex collective control or group control is selected.
 *3 Included in the standard specifications for Thailand, Laos, Myanmar, and Cambodia.
 *4 EBOPS (UPS) is provided as a standard specification when it is required by regulations.

● : Standard / ○ : Option

No.	Name	Description	Passenger Service	Bed ^{*1}
Accessibility				
1	Car floor button flashing	The registered car destination floor button flashes when the car approaches the floor.	●	●
2	Braille plate	Braille plates are fixed next to the operation buttons in the car and hall.	○	○
3	Sound button	An electronic tone sounds when the buttons are pressed to confirm call registration.	○	○
4	Induction loop for hearing devices^{*2}	This function allows a passenger to select the "Telecoil mode" on their hearing aid or cochlear implant to communicate with people at other locations via the intercom in an emergency. It conveys the audio signal from the intercom directly to the passenger's hearing aid or cochlear implant.	○	○
Security functions				
1	Intelligent operation security system by card reader (by others)	This function allows controlled access to certain floor by means of ID cards. Note: ID card-reader system is to be provided and installed by others. Interfacing shall be by means of dry (voltage-free) contacts.	○	○
2	CCTV (Camera by others, coaxial cable by Hitachi)	This system enables the security personnel to monitor inside the elevator car. This will be effective in preventing criminal and mischievous acts inside the elevator car. (CCTV system, including wiring, is to be supplied by others.)	○	○
Information functions				
1	IC auto announcement (English / Thai / Mandarin / Cantonese / Portuguese)	Preset standard messages are announced to the passengers.	○	○
2	Public address speaker	A speaker for background music and public announcements for the building can be installed in the elevator. (Music and announcement systems, including wiring, are to be provided by others.)	○	○
3	Arrival audio signal	An electrical chime (located at the top and bottom of the elevator) will sound just before the arrival of the elevator.	○	○
Energy-saving functions				
1	Regenerative system	When traveling downwards with a heavy car load or upwards with a light car load, the traction machine acts as a power generator to transmit power back to the electrical network in the building.	○	○
2	Automatic turn-off of elevator light and fan	In the event that the elevator is not in use, the light and ventilation fan in the elevator are automatically turned off to conserve energy.	●	●
User services				
1	Door open time adjustment	The duration of the door open timing is tailored to usage conditions, substantially improving operational efficiency.	●	●
2	Door open prolong button	In the event that this button on the car operation board is pressed, the elevator doors remain open for a pre-set period of time.	○	●
3	Automatic bypass operation	In the event that the elevator is fully loaded, this operation will not respond to any hall calls and will only respond to the car calls.	○	○
4	Mischievous call cancellation	In the event that a large number of calls is registered by a small number of passengers, the calls are determined to be mischievous and will be automatically cancelled upon responding to the next call. This eliminates unnecessary stops.	●	●
5	Floor "deselect" function	This function allows passengers to cancel the selection of a floor which is accidentally pressed by pressing the button again. (This eliminates unnecessary stops.)	●	●
6	Supervisory panel	This panel provides various supervisory operations, including communication and status monitoring.	○	○
7	Elevator monitoring system (EMS)	This system shows the real time situation of the elevators such as the elevator position, movement direction and abnormal operation on the PC (Personal Computer) display. It is also possible to turn on/off the elevators and change the service floors of the elevators using the PC.	○	○
8	Ion generator^{*3}	A device that generates ionized microparticles enclosed in water is mounted on top of the car to ensure pleasant air quality inside the elevator.	○	○

*1 Bed type: Available for Thailand, Myanmar, Cambodia, Laos, the Philippines, Vietnam, Macau, Indonesia and Saudi Arabia.
 *2 Induction loop for hearing devices is used in combination with EN81-20/50.
 *3 The ion generator is not available in the following cases:
 (1) When the ceiling is supplied by the customer.
 (2) When the car internal depth is 1,250 mm or less.




Functions

● : Standard / ○ : Option

No.	Name	Description	Passenger Service	Bed ^{*1}
Emergency operations				
1	Earthquake emergency operation	In the event that an earthquake is detected, the elevator will stop at the nearest floor.	○	○
2	Fire emergency operation	In the event of fire, the elevator is automatically brought to the designated floor where it remains inoperative for passengers' safety.	○	○
3	Automatic rescue device for power failure	In the event of power failure, this system automatically switches to battery power to bring the elevator to the nearest floor.	○	○
4	Emergency operation for power failure	In the event of building power failure, the elevator can be operated by the building standby generator to move the elevator to the designated floor. (Automatic / Automatic and manual)	○	○
5	Fireman operation	In the event that the fireman switch is turned on, the elevator returns to the designated floor and will be ready for firemen's use.	○	○
Other functions				
1	Counterweight safety	A safety device is installed on the counterweight to maintain the rails and prevent falling.	○	○
2	Over voltage detection device	When an abnormal increase in power supply voltage to the elevator system is detected, the power supply will be cut off to prevent damage to the elevator equipment.	○	○
3	Maintenance operation	Elevator operates at lower speed during maintenance.	●	●
4	Overload detection system	In the event of overloading, this system will activate an audio/ visual signal to prevent the elevator from moving.	●	●
5	Nearest landing door operation	In the unlikely event of temporary trouble during operation, the elevator automatically goes to the nearest floor at a low speed and doors will open to prevent passengers from being trapped inside.	●	●
6	Hook for protection sheet	The 3 side walls are equipped with hooks to facilitate mounting of protective mats.	○	○
7	Sub-operating panel	Additional floor selection and door open/close buttons are located on the side opposite the main operating panel.	○	○
8	Fire rated door^{*2}	2 hours fire rated landing doors are available where required.	○	○
9	Emergency landing door	If there is a long distance between floors, doors are installed in a location where the elevator can stop automatically in an emergency.	○	○
10	Switch for emergency exit	A switch stops the elevator when the emergency exit door is opened.	○	○
11	Painted equipment inside hoistway	Equipment in the hoistway is painted black.	○	○
12	Electromagnetic compatibility (EMC)	Electromagnetic compatibility function in response to EN81-20/50, etc.	○	○
13	Interfacing to building management system	This interfacing shall be done by means of electrical dry contact with the building management system for their monitoring.	○	○




*1 Bed type: Available for Thailand, Myanmar, Cambodia, Laos, the Philippines, Vietnam, Macau, Indonesia and Saudi Arabia.
 *2 Fire rated door is provided as a standard specification when it is required by regulations.

Dimensions




-  Building structure (by other contractors)
-  Wall and floor finishing (by other contractors)
-  Grouting (by other contractors)

(unit: mm)

AS-1X (2PC0) Standard

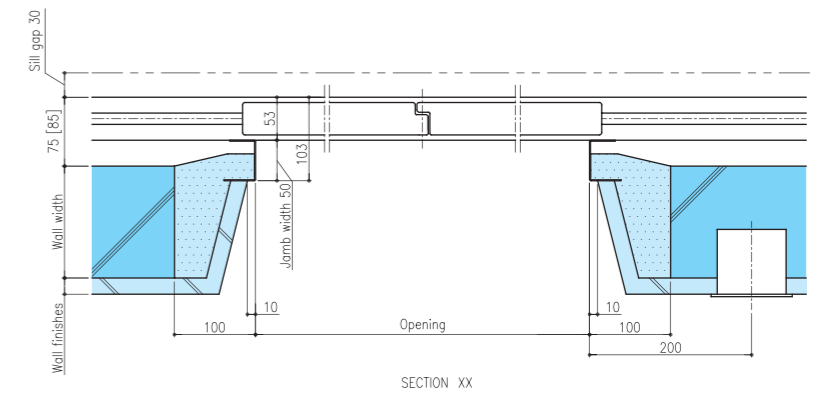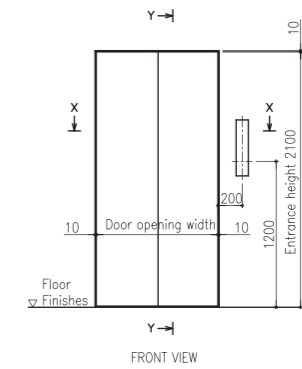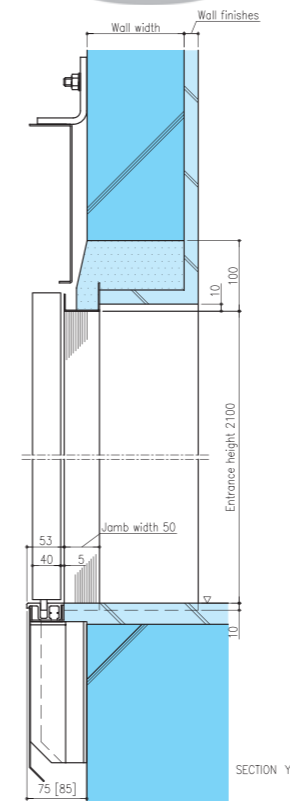



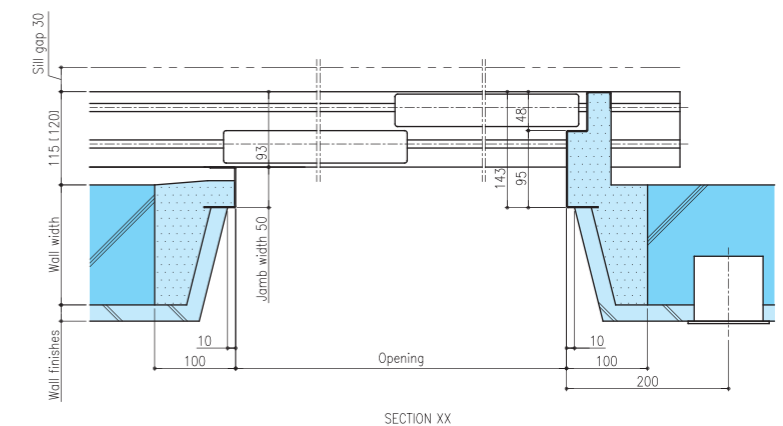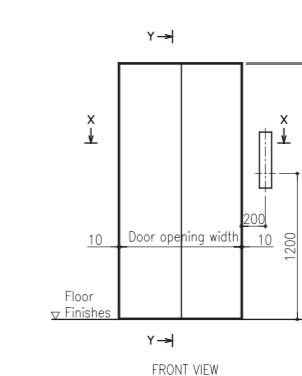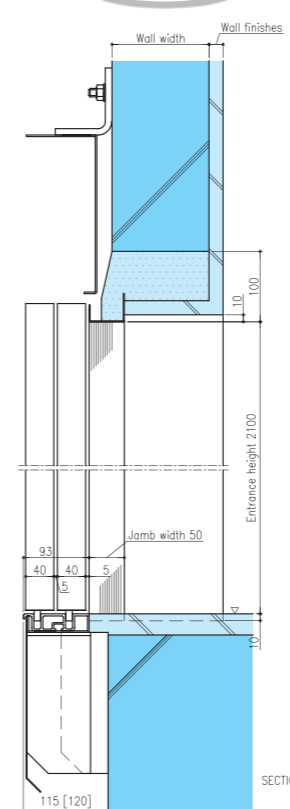



AS-1X (2S2P) Standard



Notes
 - [] : With fire rated door


Dimensions

-  Building structure (by other contractors)
-  Wall and floor finishing (by other contractors)
-  Grouting (by other contractors)

-  Building structure (by other contractors)
-  Wall and floor finishing (by other contractors)
-  Grouting (by other contractors)


SS-1X (2PCO) Option

(unit: mm)

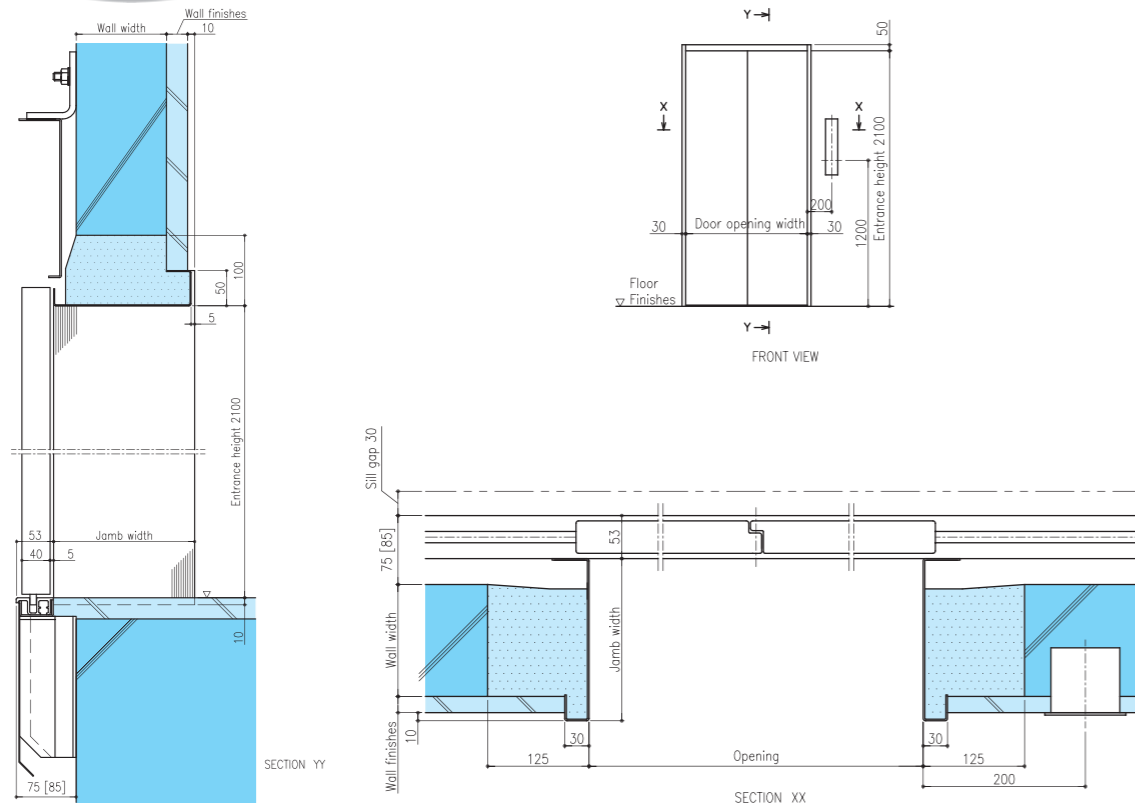


TS-1X (2PCO) Option

(unit: mm)

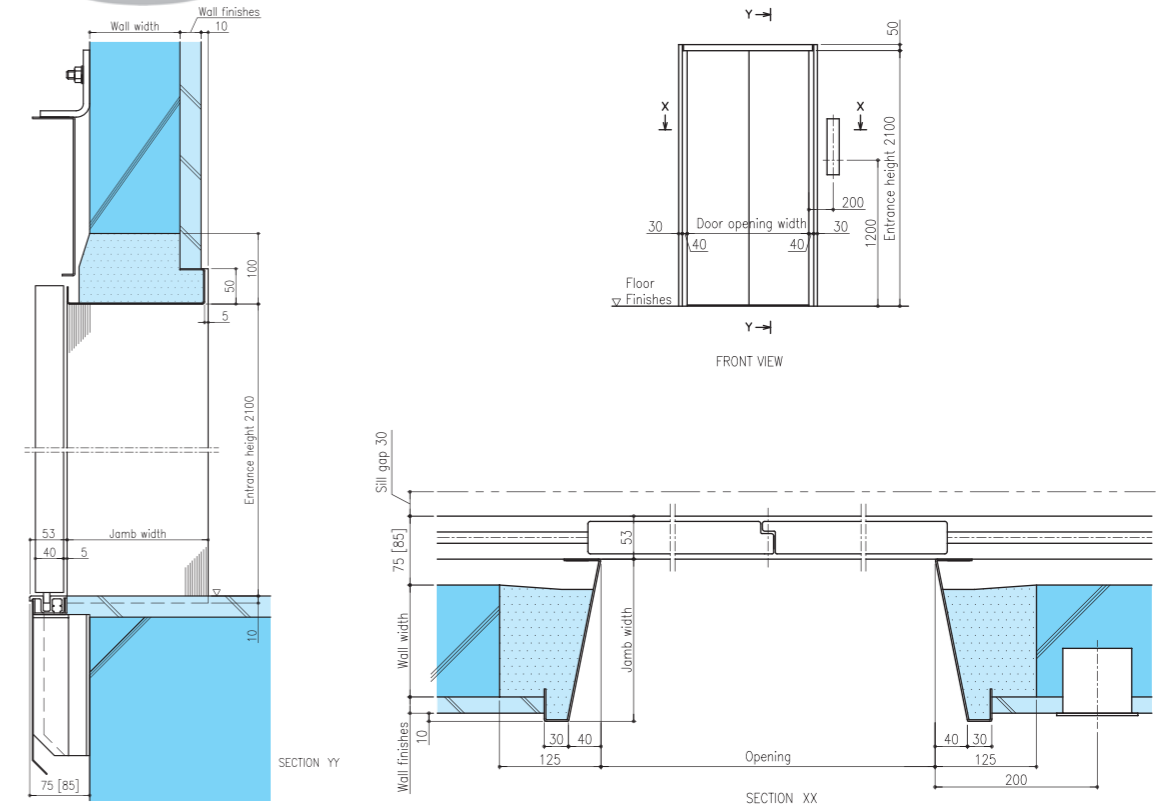


SS-1X (2S2P) Option

Notes
- [] : With fire rated door

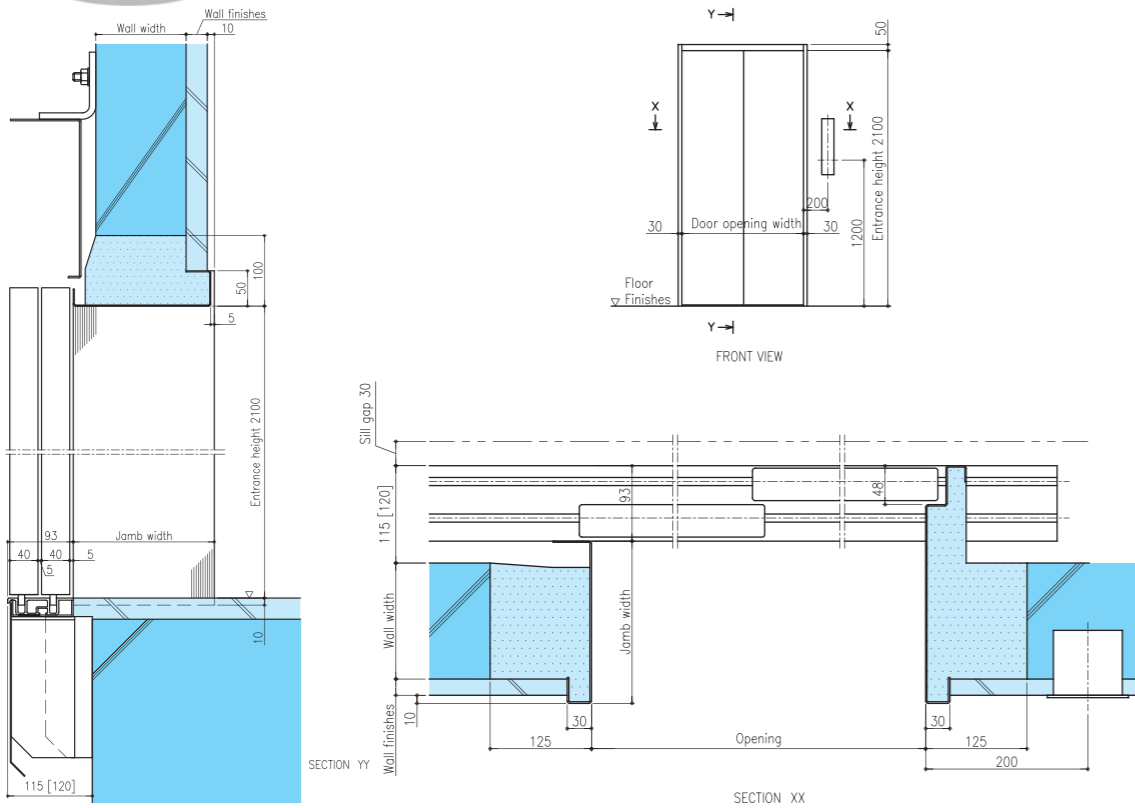



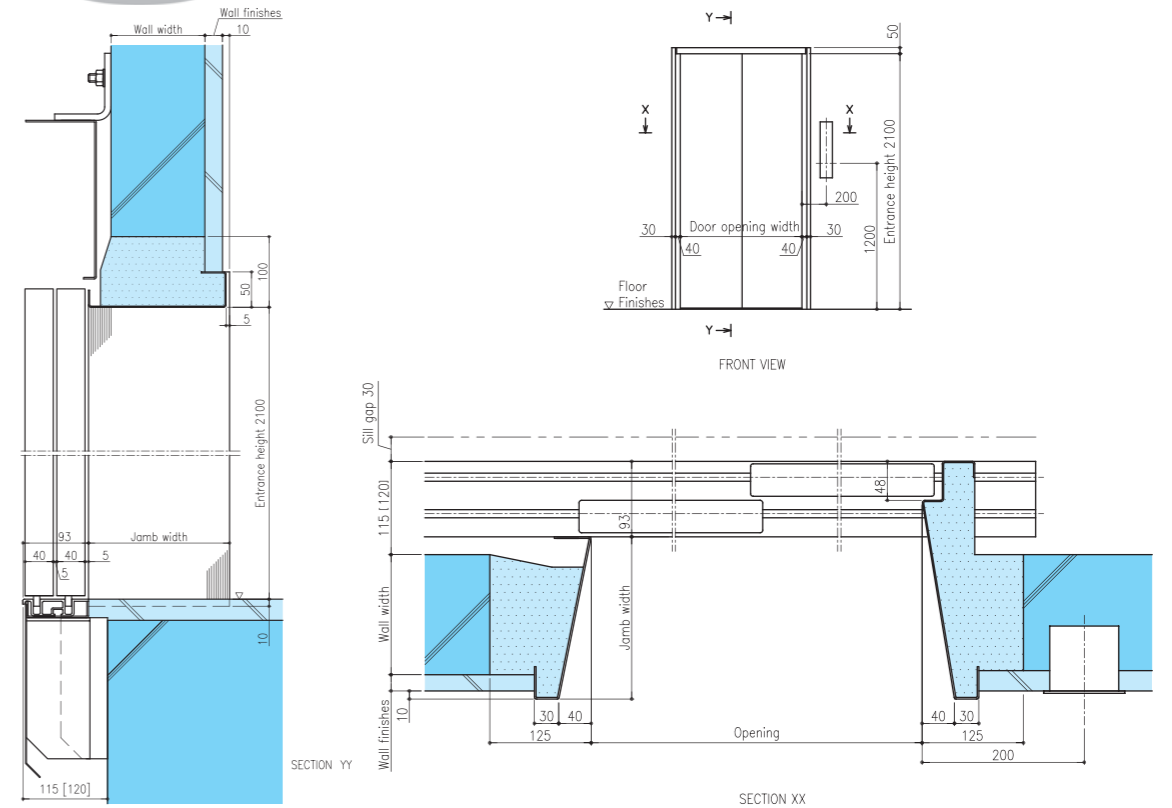



TS-1X (2S2P) Option

Notes
- [] : With fire rated door




Dimensions

-  Building structure (by other contractors)
-  Wall and floor finishing (by other contractors)
-  Grouting (by other contractors)

-  Building structure (by other contractors)
-  Wall and floor finishing (by other contractors)
-  Grouting (by other contractors)


SL-2X (2PC0) Option

(unit: mm)

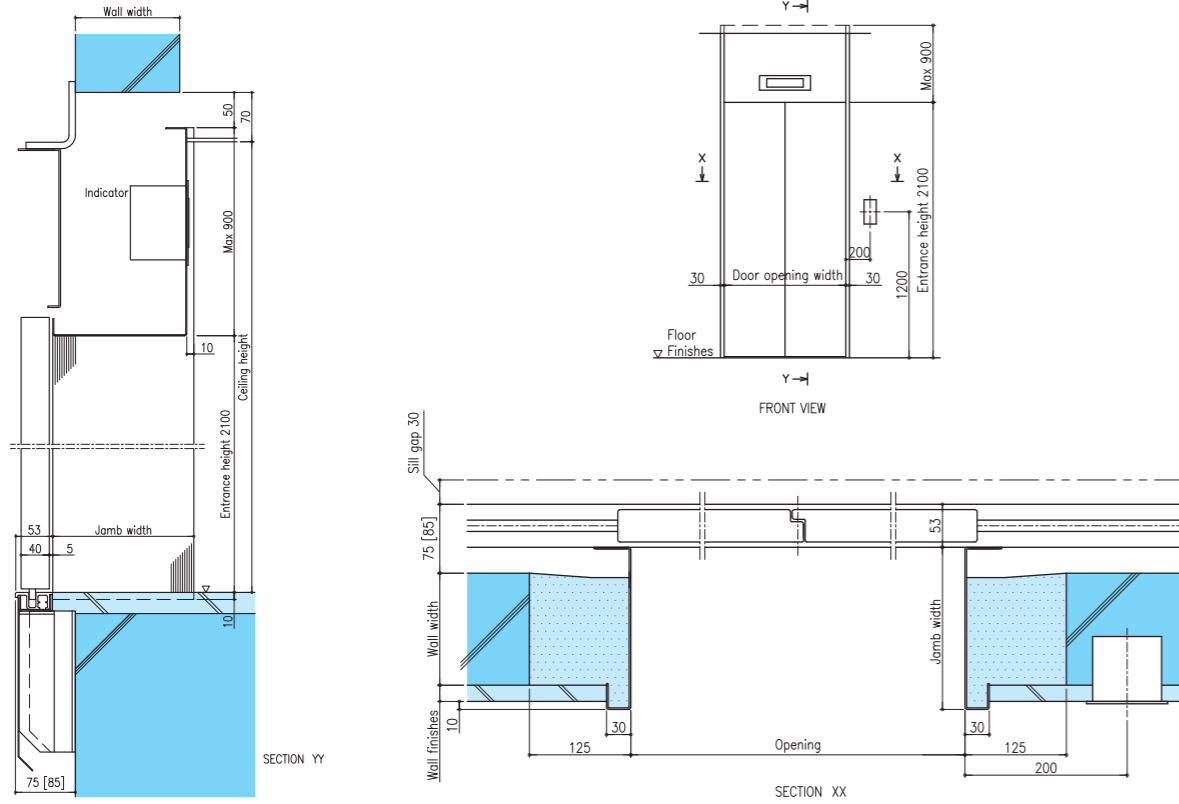


TL-2X (2PC0) Option

(unit: mm)

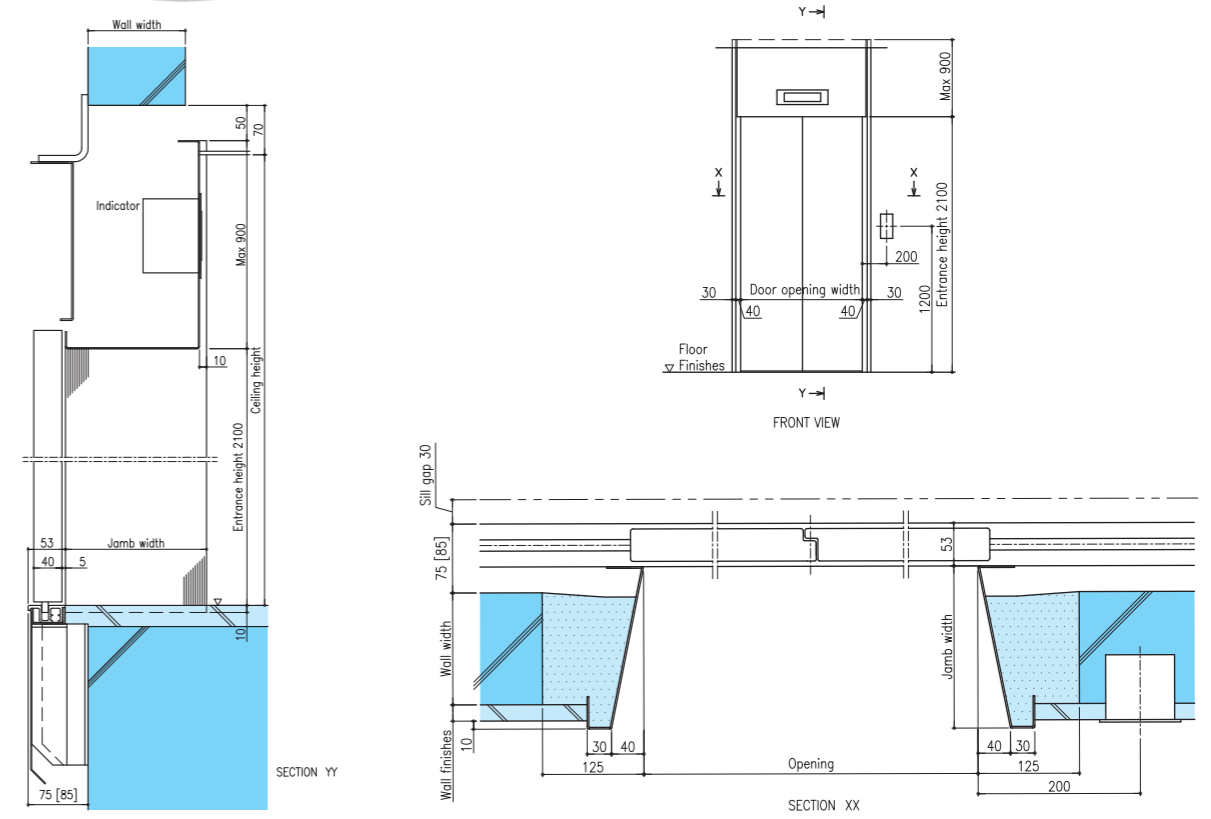


SL-2X (2S2P) Option

Notes
- [] : With fire rated door

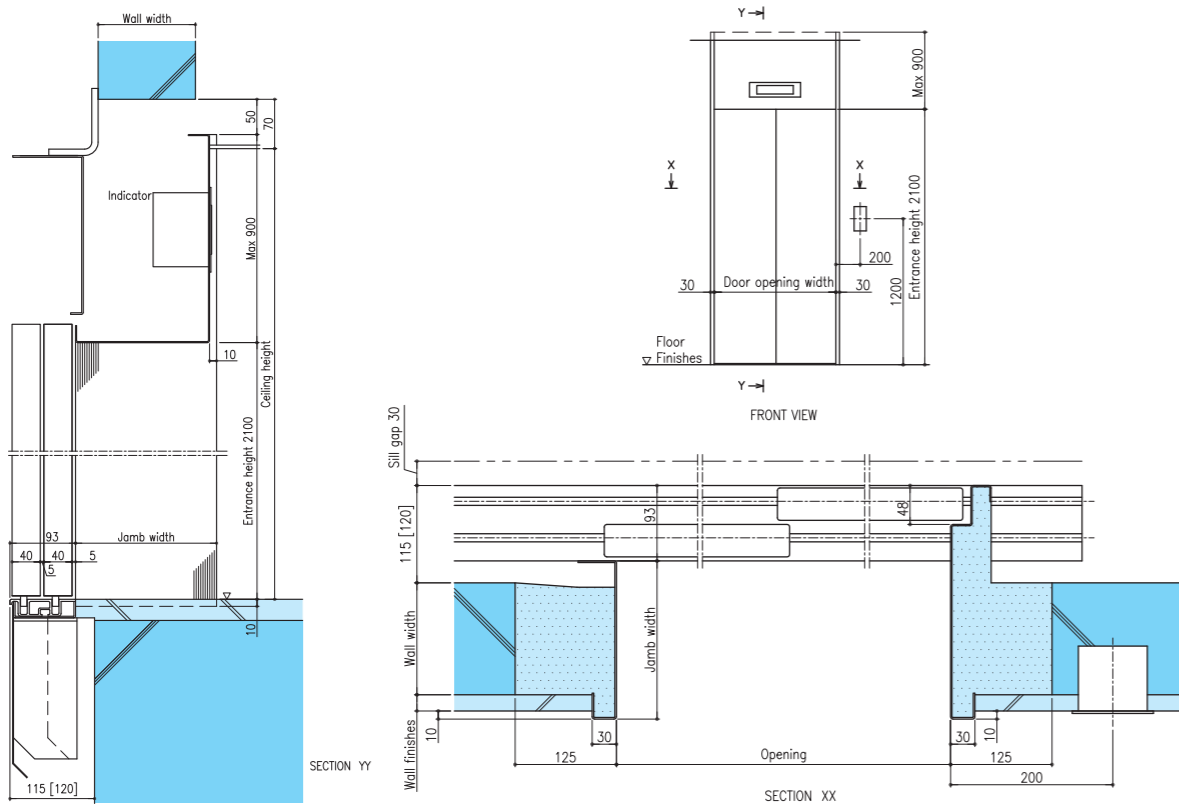

TL-2X (2S2P) Option

Notes
- [] : With fire rated door

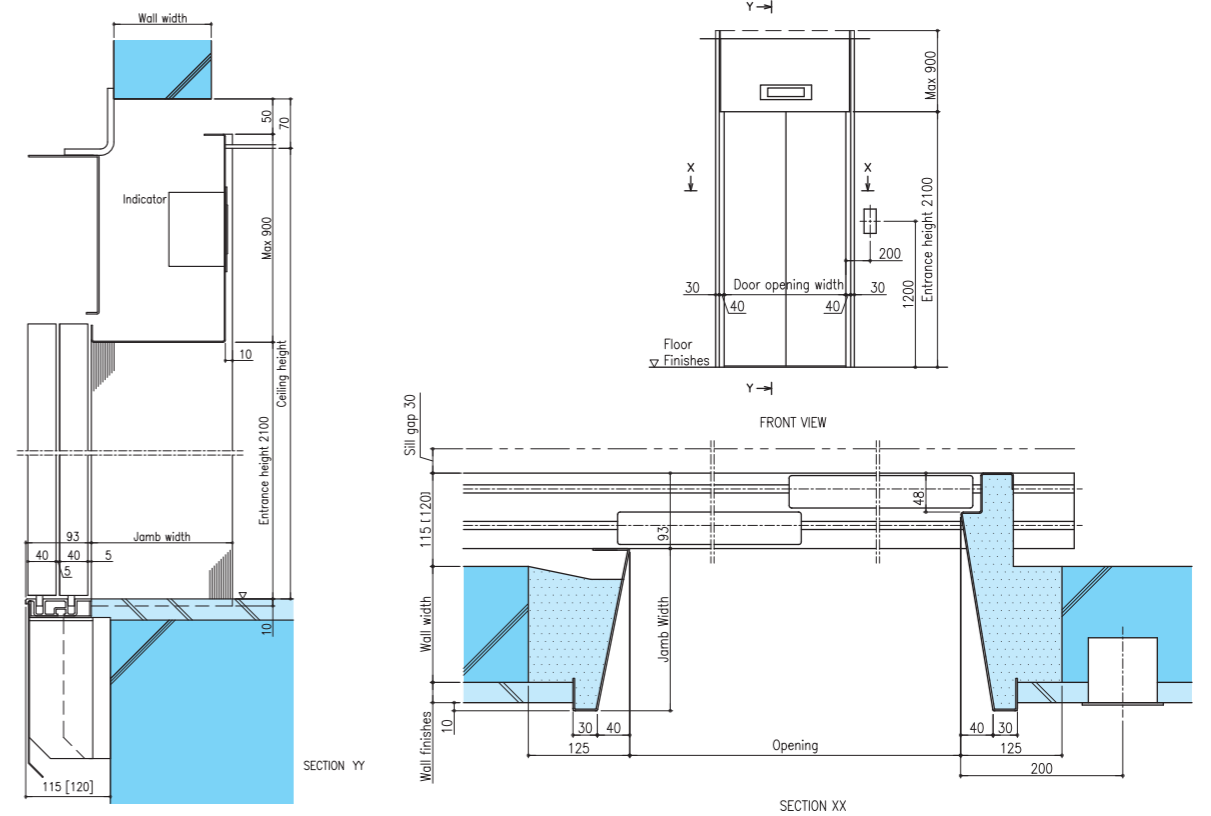

Work to be done by building contractors

The preparatory work for elevator installation outlined in the table below should be undertaken by building contractors in accordance with Hitachi drawings and in compliance with local or relevant codes and regulations.

No.	Items
1	Prepare hoistway with proper framing and enclosure, suitable pit of proper depth with drains and water-proofing if required, and properly lit and ventilated hoistway of adequate size with concrete floors, access doors, ladders and guards as required.
2	Provide and/or cut all necessary holes, chases, openings and finishes after equipment installation.
3	Supply and secure all supports, reinforced concrete slabs, etc., necessary for installation of the machinery, doors, buffers, etc.
4	Furnish all necessary cement and/or concrete for grouting of brackets, bolts, machine beams, etc.
5	Prepare and erect suitable scaffolding and protective measures during work in progress.
6	Furnish mains for three-phase electric power and single-phase lighting supply for car lighting and lift pit and power outlet to the hoistway, following the instructions of the elevator contractor on outlet position and wire size.
7	Provide, free of charge, a suitable theft-proof storage area for materials and tools during erection work.
8	Supply electric power for lighting of work area, installation work, elevator testing and spray painting.
9	Hoisting hook at top of the hoistway.
10	Hoistway ventilation to be provided to maintain the hoistway temperature at below 40°C.
11	Manufacture and installation of separating beam (if necessary).

Hitachi Eco-Achievement


Hitachi's elevators achieved the highest energy efficiency class rating.

ISO 25745 is an international standard for evaluating the energy consumption and classifying the energy efficiency of elevators and escalators. ISO 25745-2 applies to the energy efficiency of elevators. It establishes seven classes, from A to G, with class A representing the highest level of energy efficiency.

Hitachi's UAG-SN1 and OUG-ON1 have achieved the highest rating.

5. Energy efficiency certificate	
Lift energy efficiency certificate according to ISO 25745-2	
Manufacturer: Hitachi Building Systems Co., Ltd.	Energy efficiency class: A
Location: 1070 Ichige, Hitachinaka-shi, Ibaraki-ken, 312-8506 Japan	
Lift model: UAG-SN1/OUG-ON1	
Lift type: Passenger Lift	
Serial number: W80516-01	
Rated load: 1,050 kg	
Rated speed: 1.75 m/s	
Operating days per year: 365	
Idle power: 248 W	Annual energy consumption as shown: 4,184 kWh
Performance level for idle: 4	
Spin standby power: 152 W	
Performance level for spin standby: 3	
Spin standby power: N/A	
Performance level for 30min standby: N/A	
Specific running energy for the average cycle: 0.561 kWh/kg/m	
Performance level for running: 1	
Usage category 6 according to ISO 25745-2:2015	
Comparisons of energy efficiency classes are possible under equal usage only.	
Date: 21.02.2017	
Reference: ISO 25745-2:2015	

Energy efficiency class A

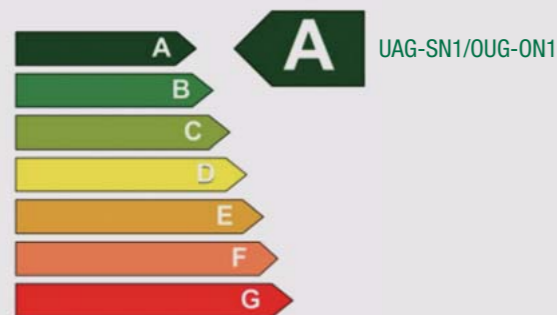

Model	UAG-SN1/OUG-ON1	UAG-SN1/OUG-ON1
Location	Japan	Japan
Rated load	1,050 kg	1,635 kg
Rated speed	1.75 m/s (105 m/min.)	1.75 m/s (105 m/min.)
No. of stops	4	4
Travel	19.5 m	19.5 m
Operating days per year	365	365
Annual energy consumption	4,184 kWh	4,633 kWh
Usage category	6	5
Classification of lift [A-G]	A	A

Notes
-The measured class differs depending on the usage conditions.

Environmental activities

The Hitachi Group is engaged in environmental initiatives at its factories and offices. Siam Hitachi Elevator Co., Ltd. (Thailand) is working to combat global warming by reducing energy consumption. Lighting in their production facilities areas has been switched to LED lighting, and they have reduced electricity consumption of lighting by approximately 70%.*

* Assuming the lighting fixtures (approximately 250 fixtures) are used under the same conditions.



Our achievement and future



The world's fastest elevator

Hitachi's elevator, which was delivered to Guangzhou CTF Finance Centre, a skyscraper complex building in Guangzhou, China, started operation with the speed of 1,260 m/min., the world's fastest* among all elevators operating today. The elevators feature technologies that support safe and comfortable operation, in addition to the drive and control technologies needed to attain the Ultrahigh-Speeds. Hitachi will utilize this achievement for future product development, and strive to offer elevators with higher running quality as well as safety and comfort.

* According to Hitachi's research as of January 2021

Drive and control technologies to attain Ultrahigh-Speed of 1,260 m/min.

Hitachi has developed a permanent magnet synchronous motor that achieves both a thin profile and the high output needed to attain a speed of 1,260 m/min.

Safety features supporting Ultrahigh-Speed elevator operation

Hitachi developed brake equipment using braking materials with outstanding heat resistance to safely stop the elevator car in the unlikely event that a malfunction is detected during Ultrahigh-Speed operation.




Traction mechanism for 1,260 m/min.

Elevators can be used comfortably with safety even over long travel.

Active guide rollers that detect minute warping in the guide rails and lateral vibration due to wind pressure are installed in the four corners (top and bottom, left and right) of the elevator car. This gives passengers a comfortable ride even during high-speed operation.

The sensation of ear blockage is reduced by Hitachi's proprietary air pressure adjustment technology, which reduces the changes in air pressure inside the elevator car that would otherwise be caused by vertical movement through long travel.

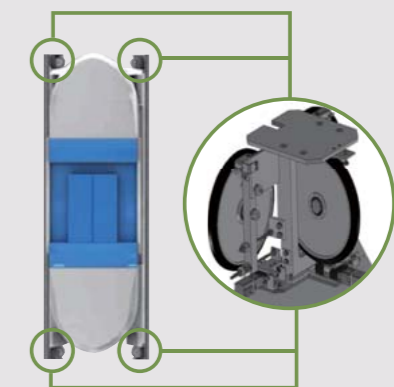

Active guide rollers (3D model)



Research and development

Modern manufacturing plants in Thailand and Singapore supply valuable products to customers. Equipment is made to the highest standards of quality and reliability on cutting-edge production lines.



Siam Hitachi Elevator Co., Ltd. (Thailand)



Hitachi Elevator Asia Pte. Ltd. (Singapore)

Excellence and flexibility in design at manufacturing plants in Thailand and Singapore

The modern manufacturing plant in Thailand and Singapore boasts a complete team of local and Japanese engineers and is geared towards providing maximum flexibility in design and manufacturing to suit customer requirements.

High accuracy and efficiency in planning of equipment layout is made possible by the most advanced CAD systems.

Equipment is made to the highest standards of quality and reliability with modern CNC machinery.



Mito Works, Hitachi, Ltd. (Japan)

An integrated engineering system from development to design and production

Head office, research centers, and plants work closely together to develop new technologies.

Staff throughout the company work together as one team to conduct research and develop technologies.

High performance simulator enhances overall elevator system efficiency.

A high-performance simulator is utilized for all stages of elevator development, from planning through system design. Planning, research and development are carried out according to the results of this statistical analysis.

Cutting-edge CAD/CAM systems

The latest in CAD/CAM systems help us carry out elevator layout and various other design and production steps more quickly and efficiently.

